






New products 2022

Contents

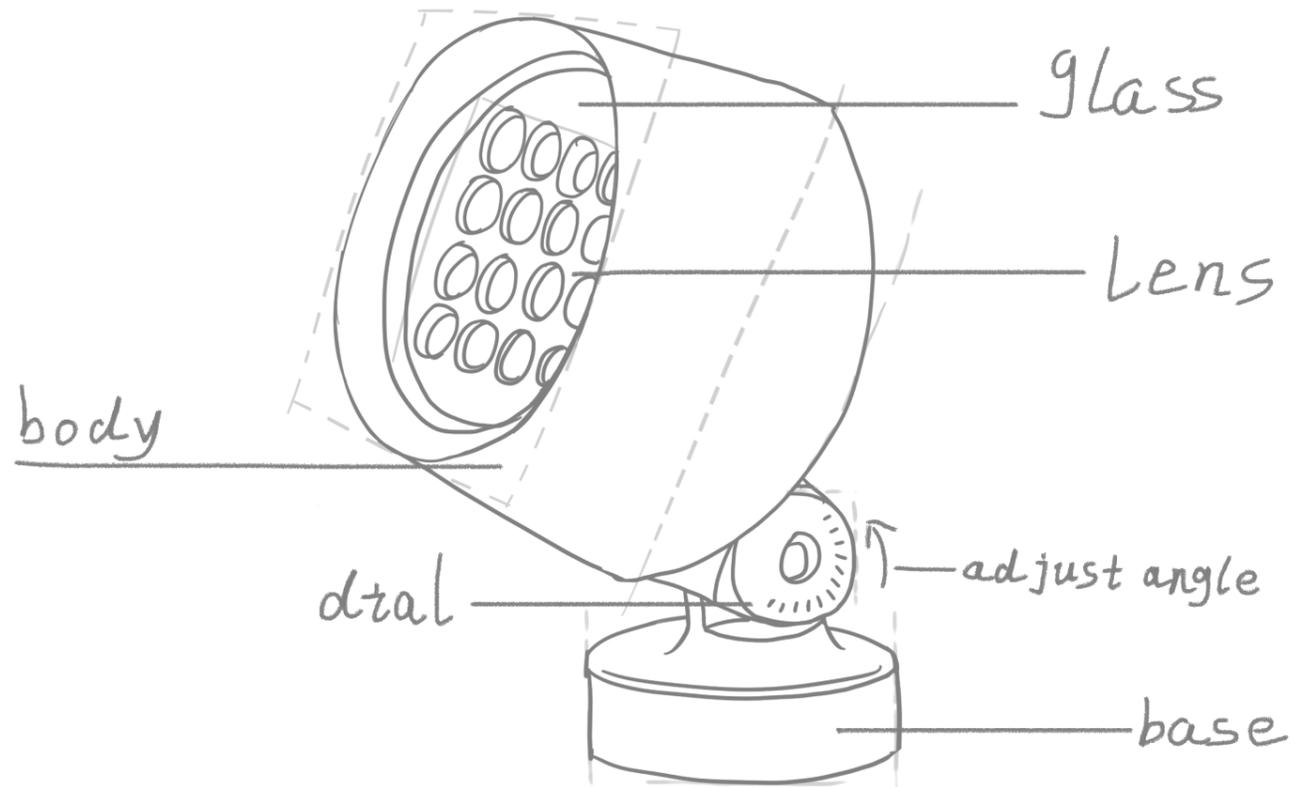

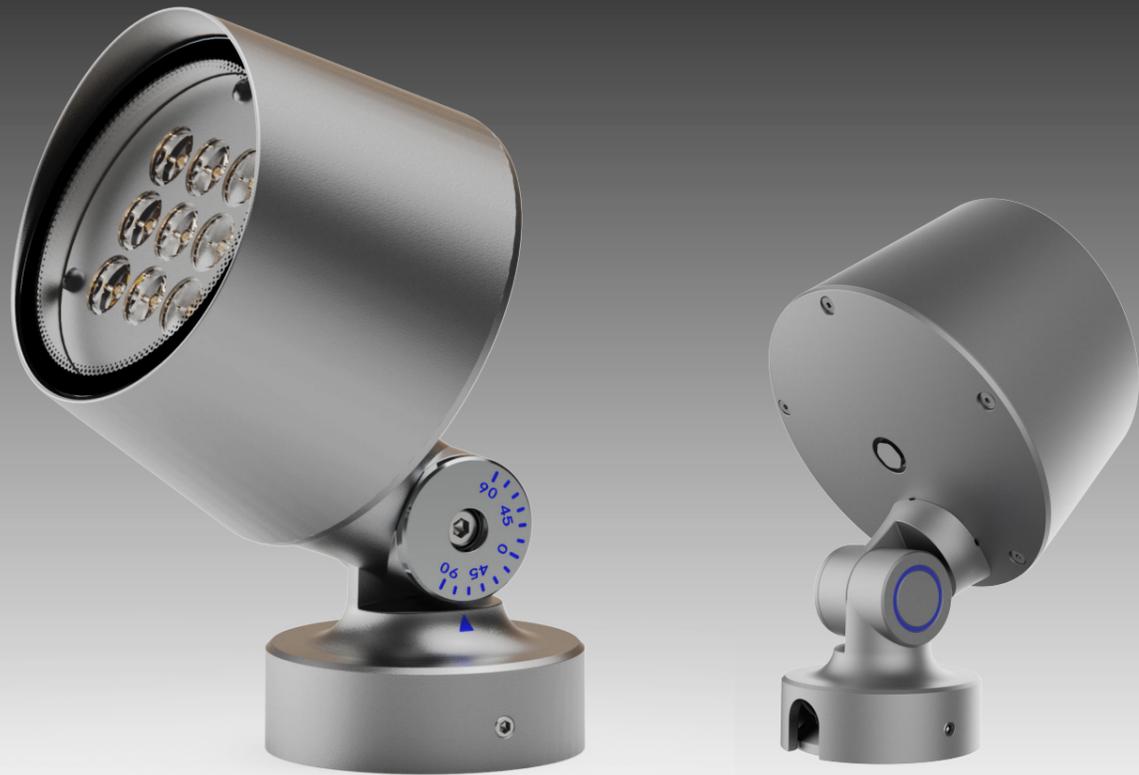


Lamp Size

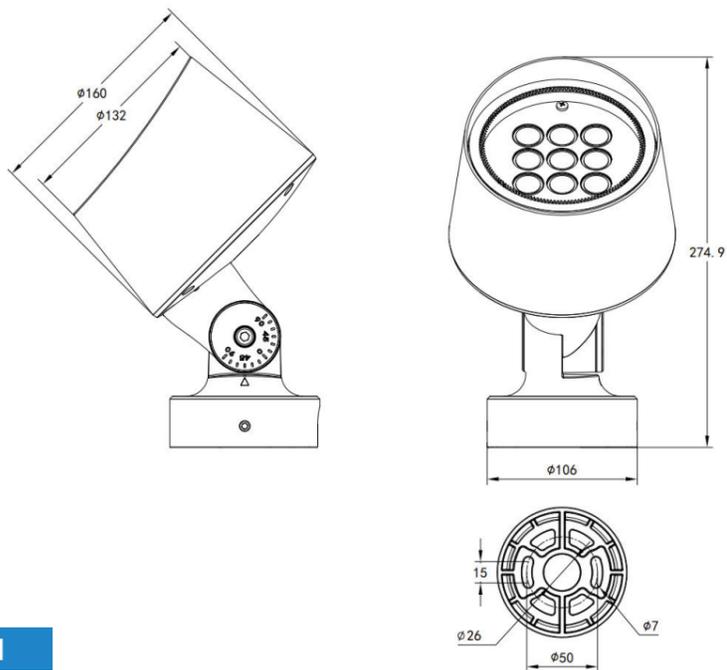


- Angle adjustable range : -90° -- 90°
- Hidden wire, windable design
- Topology optimized structural design, firm and beautiful
- Gear meshing design, easy adjustment
- Self-locking design, stable and reliable

Lamp Size

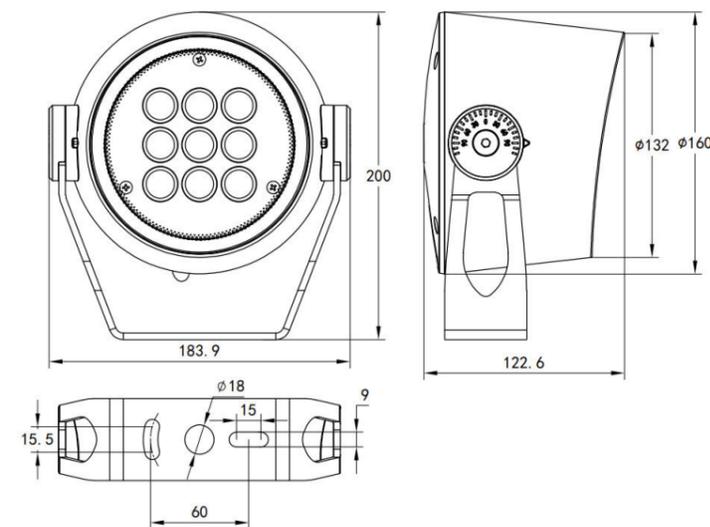


- Angle adjustable range : -120° -- 120°
- U bracket material : SPCC/aluminum
- Gear meshing structure, easy adjustment
- Self-locking design, stable and reliable

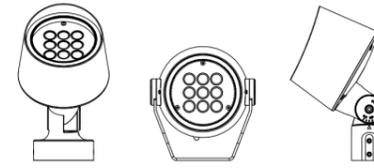


3A	Input Voltage	LED Qty	Wattage	Optical Angle	CCT	Luminous Flux	Weight/ Package (2PCS/CTN)
3A-S-004010	AC100-277V	4PCS	10W	3°	4000K	653lm	4.8KG/ 210X450X165mm
				4°/8°/15°/25°/42°/55°/10°*30°	RGBW	419lm	5.5KG/ 210X450X165mm
3A-S-006020	AC100-277V	6PCS	20W	8°/15°/25°/45°/60°/15°*35°	4000K	1912lm	5.0KG/ 210X450X165mm
				12°/25°/45°/60°/10°*60°/15°*35°	RGBW	838lm	5.7KG/ 210X450X165mm
3A-S-009030	AC100-277V	9PCS	30W	8°/15°/25°/45°/60°/15°*35°	4000K	2868lm	5.2KG/ 210X450X165mm
				12°/25°/45°/60°/10°*60°/15°*35°	RGBW	1257lm	5.9KG/ 210X450X165mm



Gray RAL9006
Black RAL9005
Customized
IP66
IK08
0.025 m²
CRI >80
L90/B10 >50000H

Lamp Size

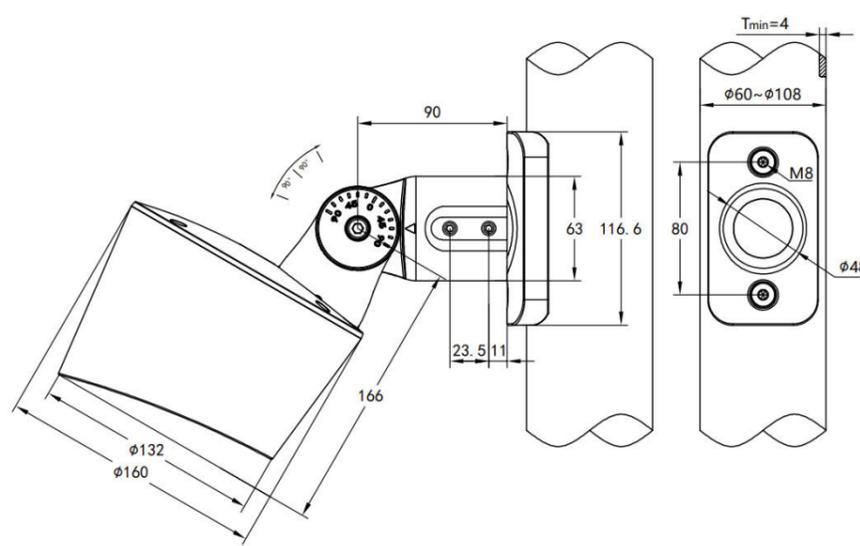


- Angle adjustable range : -90°--90°
- Suitable for any diameter pole
- Gear meshing structure, easy adjustment
- Self-locking design, stable and reliable

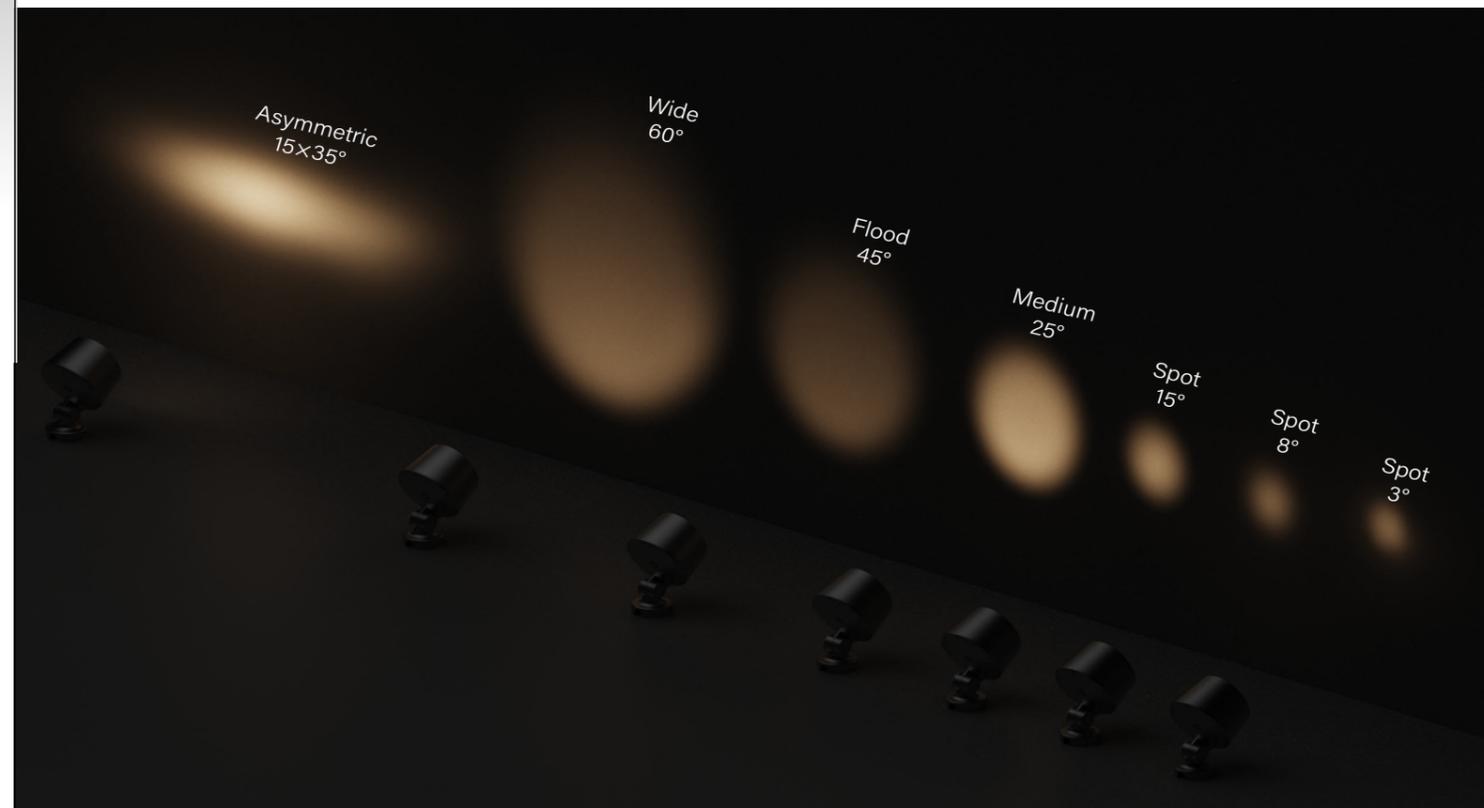

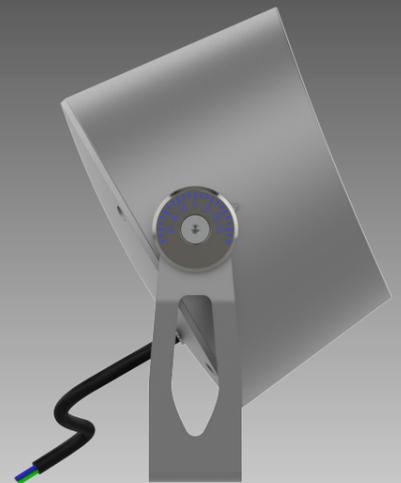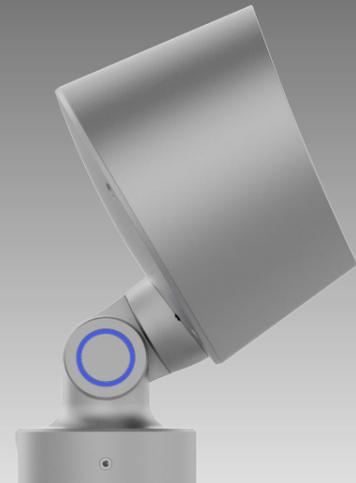


Lamp Size

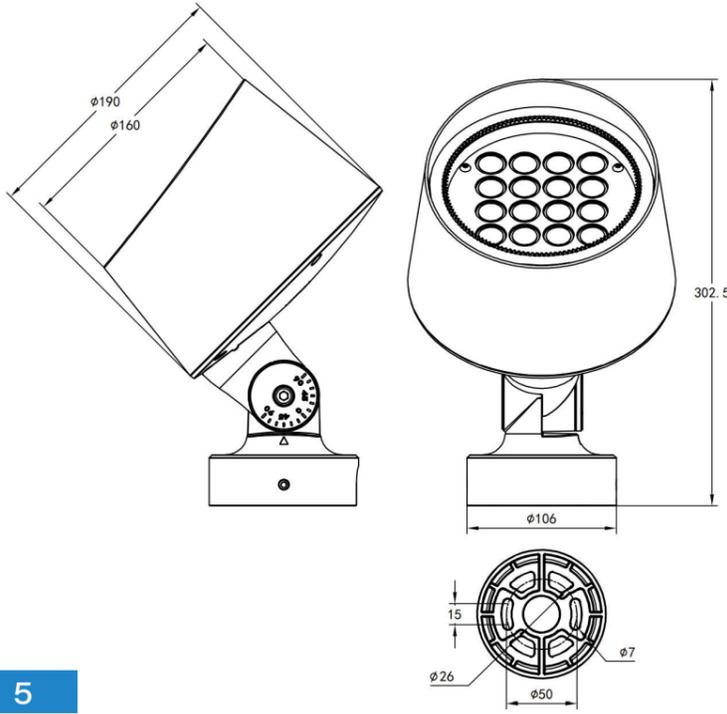


- Angle adjustable range : -90°--90°
- Hidden wire, windable design
- Topology optimized structural design, firm and beautiful
- Gear meshing design, easy adjustment
- Self-locking design, stable and reliable

Lamp Size

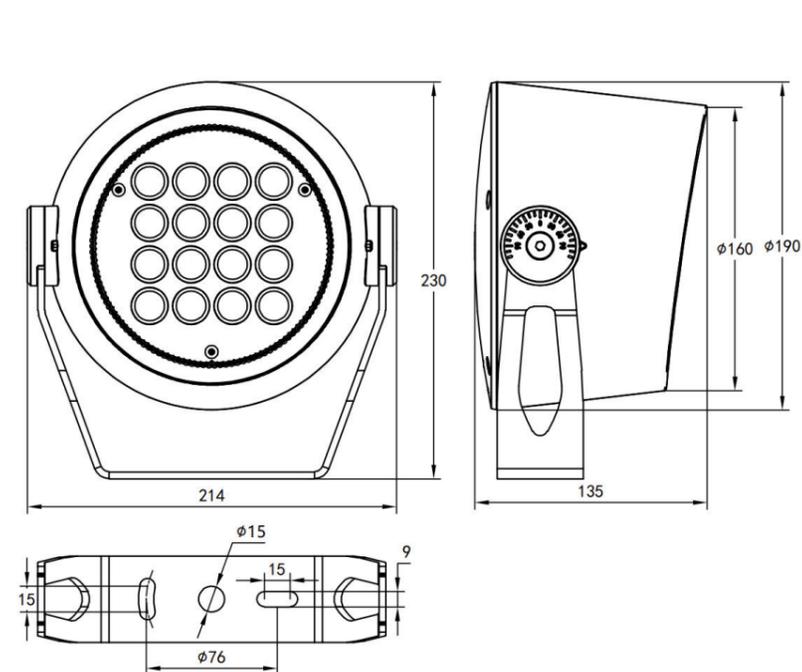


- Angle adjustable range : -120°--120°
- U bracket material : SPCC/aluminum
- Gear meshing structure, easy adjustment
- Self-locking design, stable and reliable

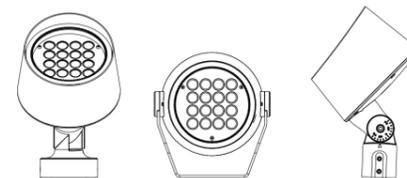


3B	Input Voltage	LED Qty	Wattage	Optical Angle	CCT	Luminous Flux	Weight/ Package (2PCS/CTN)
3B-M-009030	AC100-277V	9PCS	30W	3°	4000K	1907lm	6.3KG/ 235X474X195mm
				4°/8°/15°/25°/42°/55°/10°*30°	RGBW	1257lm	6.9KG/ 235X474X195mm
3B-M-012040	AC100-277V	12PCS	40W	8°/15°/25°/45°/60°/15°*35°	4000K	3959lm	6.5KG/ 235X474X195mm
				12°/25°/45°/60°/10°*60°/15°*35°	RGBW	1694lm	7.1KG/ 235X474X195mm
3B-M-016050	AC100-277V	16PCS	50W	8°/15°/25°/45°/60°/15°*35°	4000K	5048lm	6.5KG/ 235X474X195mm
				12°/25°/45°/60°/10°*60°/15°*35°	RGBW	2118lm	7.1KG/ 235X474X195mm
3B-M-016060	AC100-277V	16PCS	60W	8°/15°/25°/45°/60°/15°*35°	4000K	5938lm	6.8KG/ 235X474X195mm
				12°/25°/45°/60°/10°*60°/15°*35°	RGBW	2467lm	7.4KG/ 235X474X195mm



Lamp Size

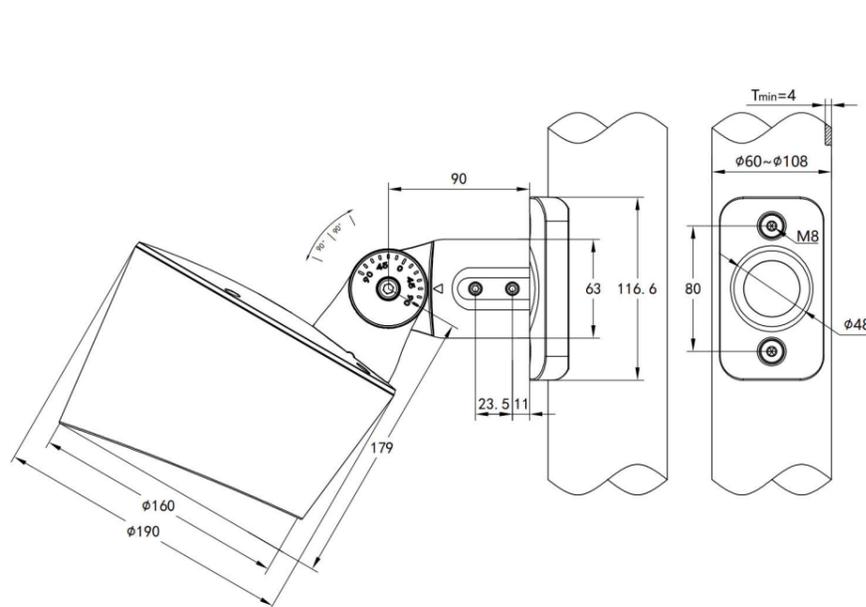


- Angle adjustable range : -90°--90°
- Suitable for any diameter pole
- Gear meshing structure, easy adjustment
- Self-locking design, stable and reliable

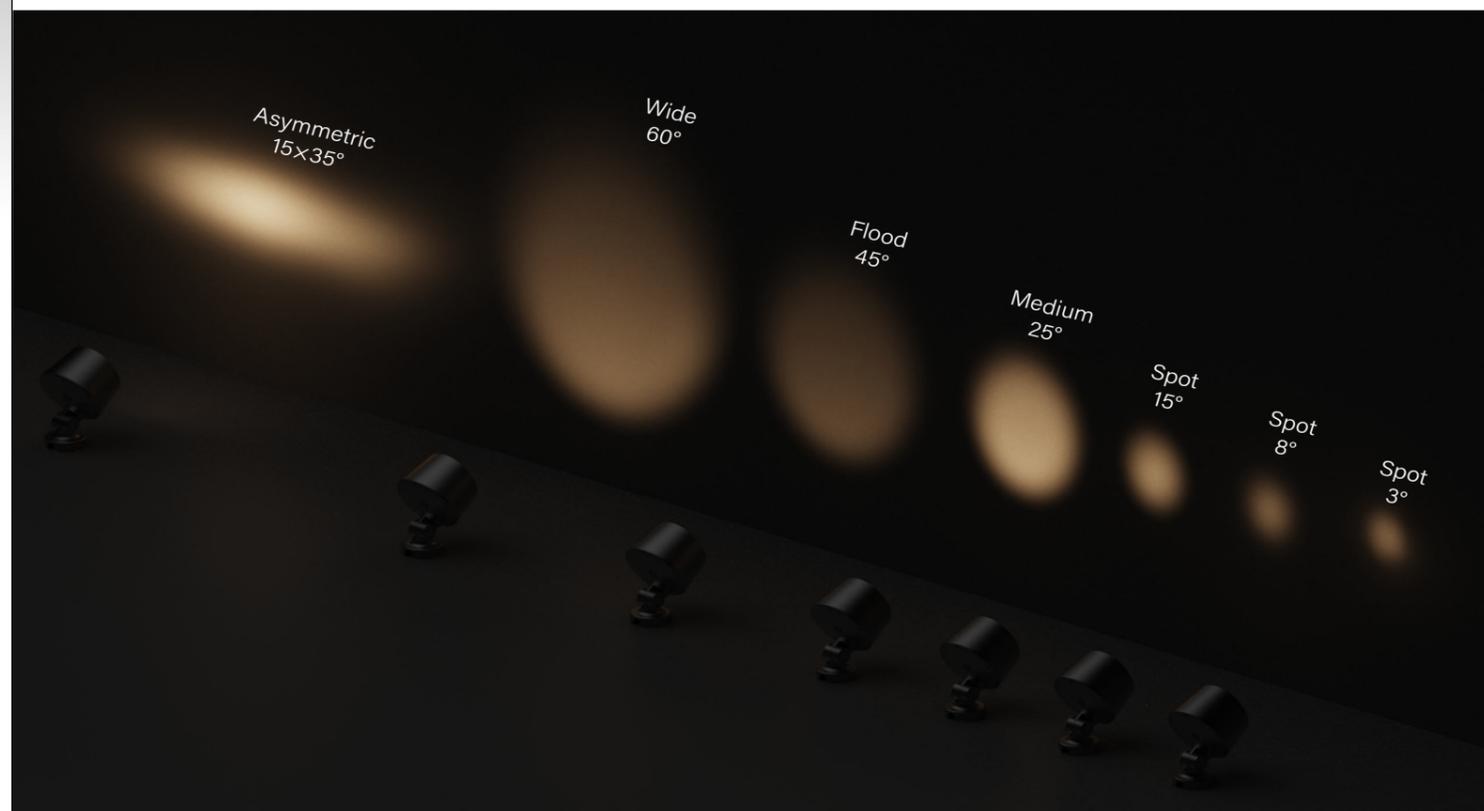




Lamp Size

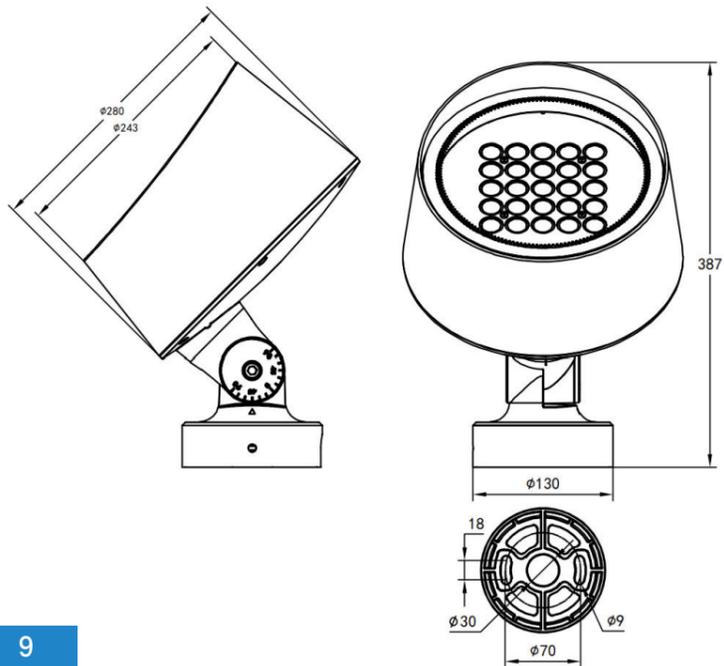

- Angle adjustable range : -90°--90°
- Hidden wire, windable design
- Topology optimized structural design, firm and beautiful
- Gear meshing design, easy adjustment
- Self-locking design, stable and reliable





Lamp Size

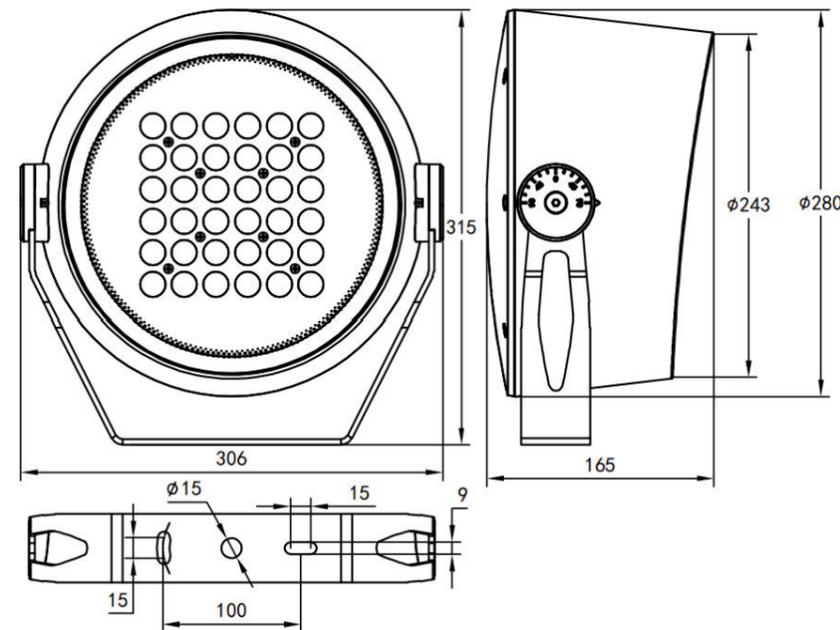


- Angle adjustable range : -120°--120°
- U bracket material : SPCC/aluminum
- Gear meshing structure, easy adjustment
- Self-locking design, stable and reliable



Lamp Size

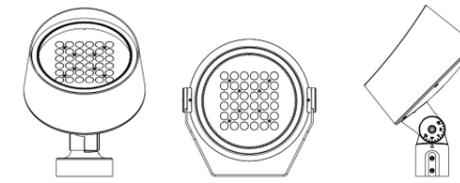
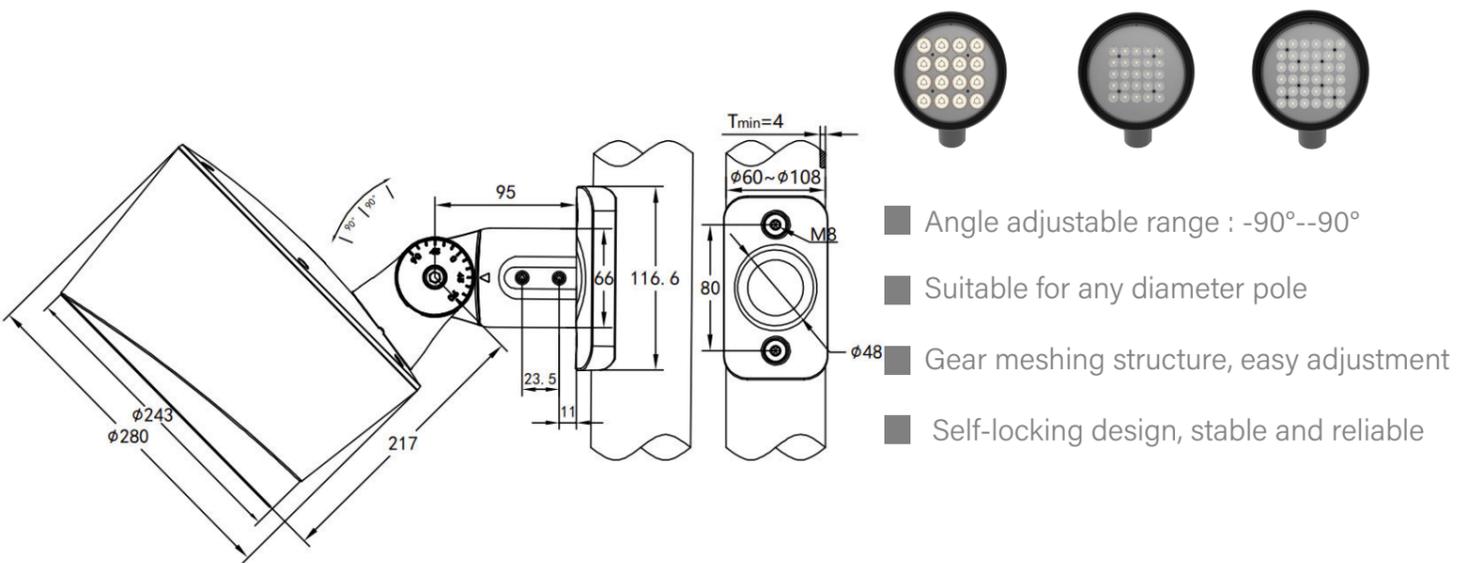


3C	Input Voltage	LED Qty	Wattage	Optical Angle	CCT	Luminous Flux	Weight/ Package (2PCS/CTN)
3C-L-016060	AC100-277V	16PCS	60W	3°	4000K	3814lm	11.0KG/ 335X580X285mm
				4°/8°/15°/25°/42°/55°/10°*30°	RGBW	2514lm	11.8KG/ 335X580X285mm
3C-L-025080	AC100-277V	25PCS	80W	8°/15°/25°/45°/60°/15°*35°	4000K	7918lm	11.5KG/ 335X580X285mm
				12°/25°/45°/60°/10°*60°/15°*35°	RGBW	3352lm	12.3KG/ 335X580X285mm
3C-L-036100	AC100-277V	36PCS	100W	8°/15°/25°/45°/60°/15°*35°	4000K	10096lm	11.8KG/ 335X580X285mm
				12°/25°/45°/60°/10°*60°/15°*35°	RGBW	4190lm	12.6KG/ 335X580X285mm
3C-L-036120	AC100-277V	36PCS	120W	8°/15°/25°/45°/60°/15°*35°	4000K	11879lm	12.2KG/ 335X580X285mm
				12°/25°/45°/60°/10°*60°/15°*35°	RGBW	5028lm	13.0KG/ 335X580X285mm

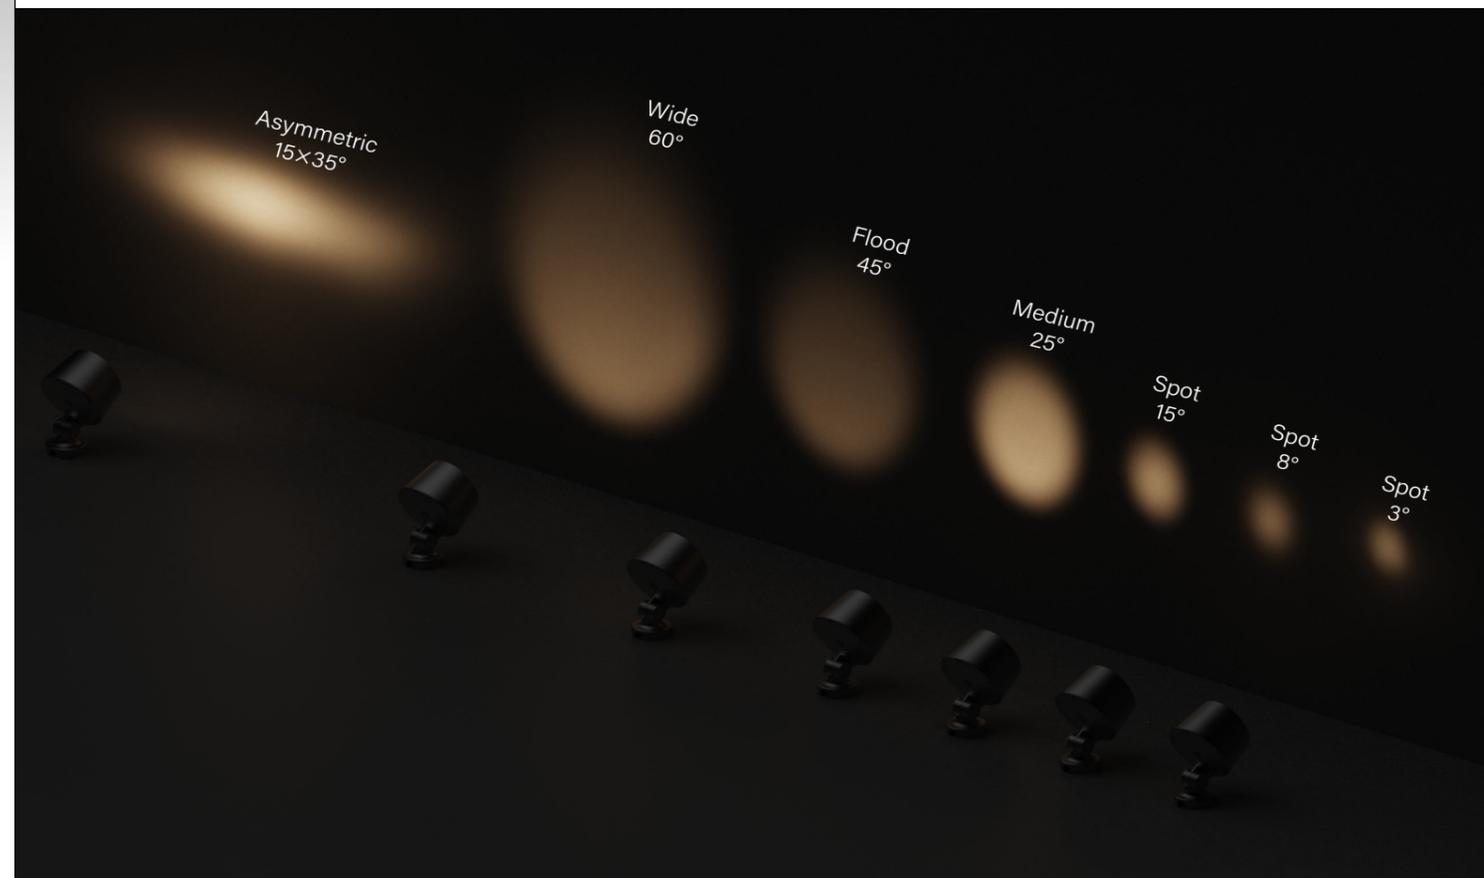

Shallow Light Source (Standard)


Deep Light Source (Optional)

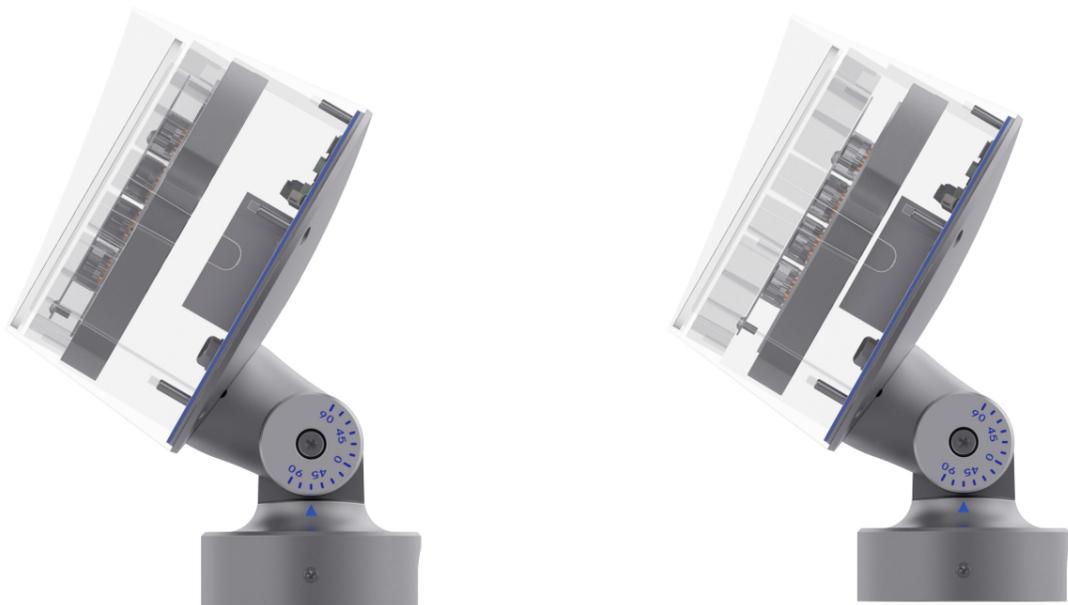

The Light Source's depth Can be adjustable.
(Distance from Glass to light source = 0mm - 22mm)


- Different light effects.
- Better Anti Glear.

Wiring Diagram

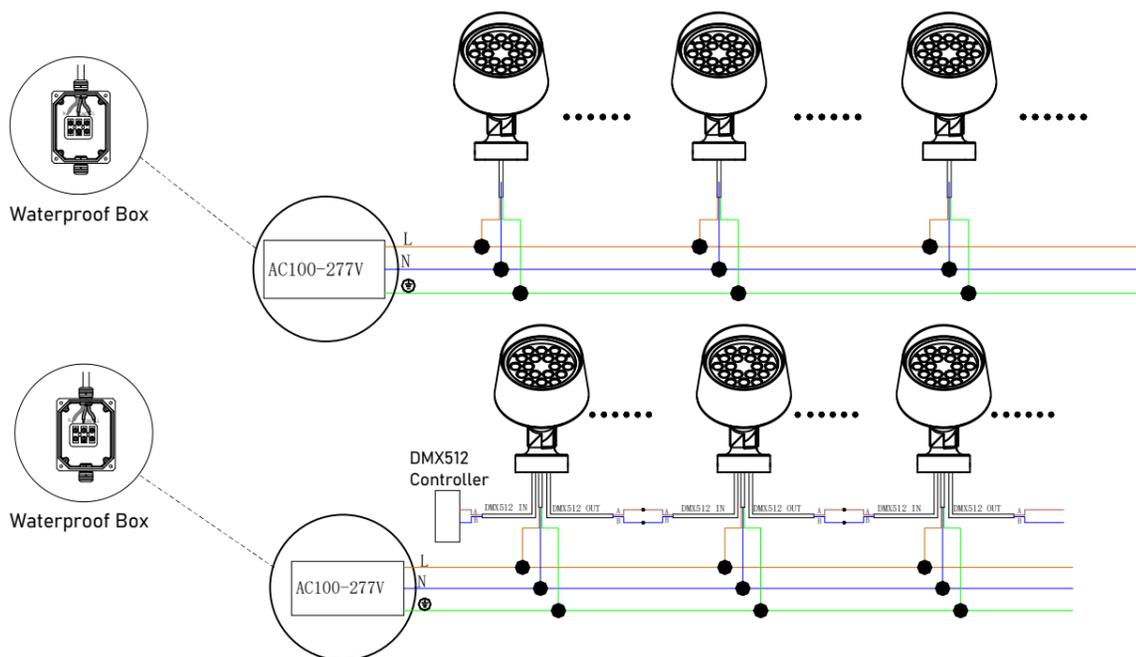


Standing pole mounted

- Straight Pole (3A/3B/3C)
(Size Customized)

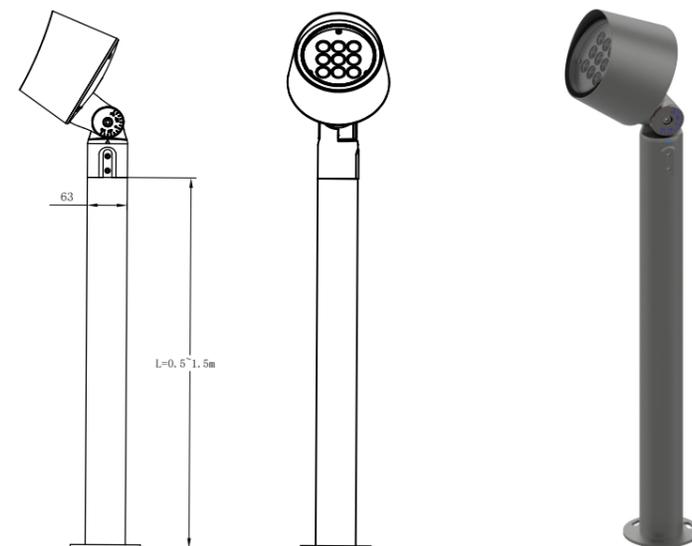


wa AouAteD

- Spike (3A/3B/3C)
(Size Customized)

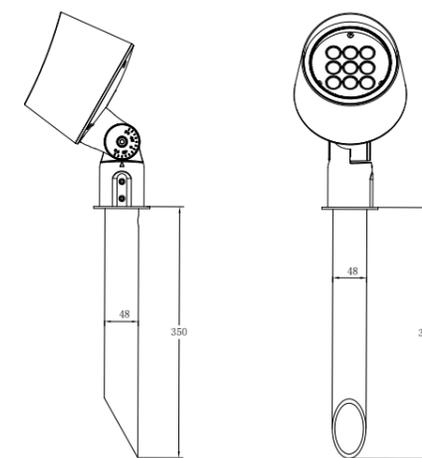

Anti Glear Solution

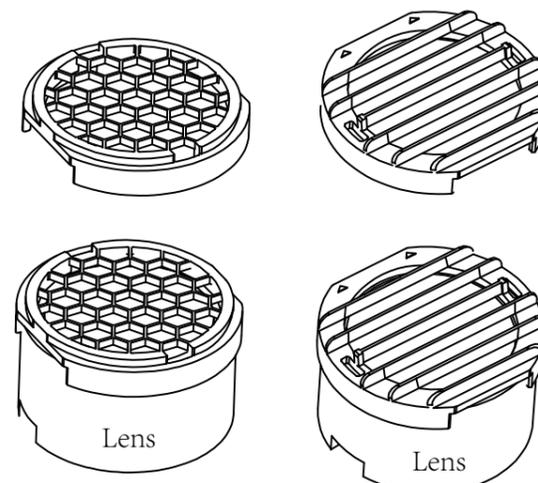

- Two types optional: Honey Comb or Grill.
- Covered single lens, for Anti-Glear function.