




Unique LED layout, light efficiency 120LM/W<sup>^</sup>



Single module rotatable



Various replaceable optical lens

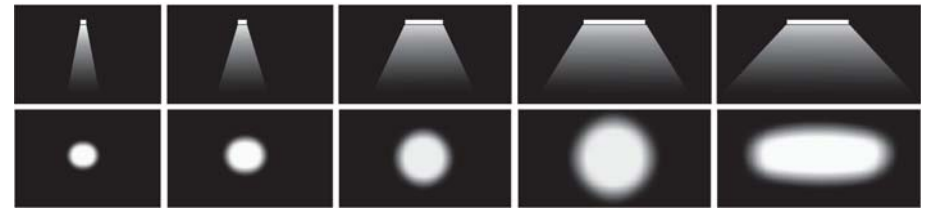

15°

30°

60°

110°

X135-Y65°



**CO-50W**

6,000LM  
72PCS  
238×102×178mm  
2.1kg ± 5%



**CO-100W**

12000LM  
144PCS LED  
238\*219\*227MM  
3.2KG ± 5%



**CO-150W**

18000LM  
216PCS LED  
238\*340\*227MM  
4.1KG ± 5%



**CO-200W**


24000LM  
288PCS LED  
425\*219\*227MM  
5.5KG ± 5%



**CO-300W**

36000LM  
432PCS LED  
425\*340\*227MM  
8.4KG ± 5%

**INSTALLATION**

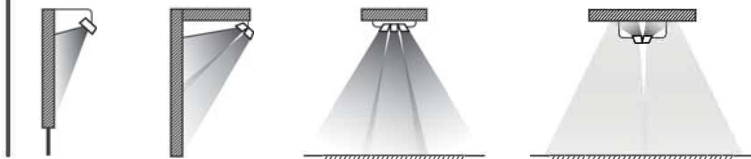

Flood Light



<b>WATTAGE</b>	50/100/150/200/300W
<b>LIGHT SOURCE</b>	SAMSUNG
<b>LED QUANTITY</b>	72 LEDS EACH MODULE
<b>DRIVER</b>	MEANWELL
<b>LED LUMINOUS FLUX</b>	150-160LM/W
<b>LAMP LUMINOUS FLUX</b>	120LM/W±5%
<b>CRI</b>	RA>80
<b>CCT</b>	2700-6500K
<b>RATED VOLTAGE</b>	AC 85-265V,DC24V 50/60HZ
<b>POWER FACTOR</b>	>0.95
<b>BEAM ANGLE</b>	X-135°,Y-65° /15° /30° /45° /60° /110°
<b>IP GRADE</b>	IP65
<b>HEAT SINK</b>	ALUMINUM COOLING FIN/AIR FLOW COOLING
<b>OPERATING TEMP</b>	-40℃~60℃
<b>STANDARD</b>	CE-EMC, CE-LVD, IEC, ROHS, ISO9001:2008

Flood Light